



## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification <sup>6</sup> : <b>A61F 13/15</b>	<b>A2</b>	(11) International Publication Number: <b>WO 96/17574</b> (43) International Publication Date: 13 June 1996 (13.06.96)
--	-----------	---

(21) International Application Number: PCT/US95/15904


(22) International Filing Date: 6 December 1995 (06.12.95)

(30) Priority Data:  
08/350,920 7 December 1994 (07.12.94) US(71) Applicant: McNEIL-PPC, INC. [US/US]; Grandview Avenue,  
Skillman, NJ 08558 (US).(72) Inventors: PELLEY, Kenneth; 104 Stony Brook Road,  
Hopewell, NJ 08525 (US). FOELSCH, Lynn; 1803  
Wilshire Court, Somerville, NJ 08876 (US). BICKLEY,  
William, M.; 715 Edison Glen Terrace, Edison, NJ 08837  
(US).(74) Agents: CIAMPORCERO, Audley, A., Jr. et al.; Johnson &  
Johnson, One Johnson & Johnson Plaza, New Brunswick,  
NJ 08933-7003 (US).(81) Designated States: AU, BR, CA, JP, MX, SG, TT, European  
patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU,  
MC, NL, PT, SE).**Published***Without international search report and to be republished  
upon receipt of that report.*

## (54) Title: PROCESS FOR FORMING LAMINATED ABSORBENT STRUCTURE

## (57) Abstract

The present invention utilizes the smooth continuous motion of a masking belt to concentrate air-entrained absorbent materials on the surface of a moving fibrous substrate. Air flowing through the open areas of the masking belt carries the entrained material into the fibrous web. The fibrous web acts as a filter to separate the entrained material from the air stream. Substantially all dispensed material is captured by the fibrous web, and expensive and complex absorbent material recycle systems can be eliminated.

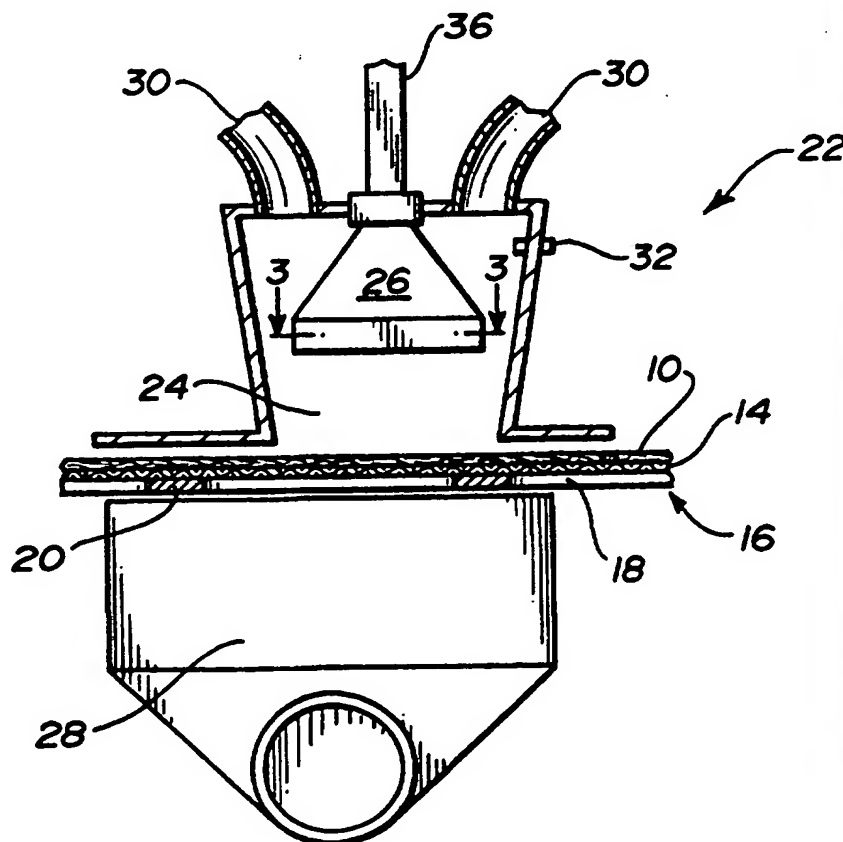

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	GB	United Kingdom	MR	Mauritania
AU	Australia	GE	Georgia	MW	Malawi
BB	Barbados	GN	Guinea	NE	Niger
BE	Belgium	GR	Greece	NL	Netherlands
BF	Burkina Faso	HU	Hungary	NO	Norway
BG	Bulgaria	IE	Ireland	NZ	New Zealand
BJ	Benin	IT	Italy	PL	Poland
BR	Brazil	JP	Japan	PT	Portugal
BY	Belarus	KE	Kenya	RO	Romania
CA	Canada	KG	Kyrgyzstan	RU	Russian Federation
CF	Central African Republic	KP	Democratic People's Republic of Korea	SD	Sudan
CG	Congo	KR	Republic of Korea	SE	Sweden
CH	Switzerland	KZ	Kazakhstan	SI	Slovenia
CI	Côte d'Ivoire	LJ	Liechtenstein	SK	Slovakia
CM	Cameroon	LK	Sri Lanka	SN	Senegal
CN	China	LU	Luxembourg	TD	Chad
CS	Czechoslovakia	LV	Latvia	TG	Togo
CZ	Czech Republic	MC	Monaco	TJ	Tajikistan
DE	Germany	MD	Republic of Moldova	TT	Trinidad and Tobago
DK	Denmark	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	US	United States of America
FI	Finland	MN	Mongolia	UZ	Uzbekistan
FR	France			VN	Viet Nam
GA	Gabon				

- 1 -

**PROCESS FOR FORMING LAMINATED ABSORBENT STRUCTURE****Field of the Invention**

5           The present invention relates to a process for forming laminated absorbent structures having reduced delamination tendencies and to products made by this process. The process provides for the application of additional absorbent material to a fibrous substrate in  
10 discrete zones. The resulting structures have improved integrity.

**Background of the Invention**

15           The manufacturers of inexpensive absorbent structures such as diapers, adult incontinence guards and pads, sanitary napkins, and panty liners are increasingly looking to the use of laminated absorbent structures to improve processing. Examples of such laminated absorbent structures are described in Chinai  
20 et al., U.S. Patent No. 4,023,570; Seidy, U.S. Patent No. 4,862,574; Luceri, EP-A-0 597 273; and the like. These structures incorporate absorbent layers which are generally made by air-laying fibers to form a continuous web. These absorbent layers may provide the majority of  
25 the absorbent capacity of the product, or they may be supplemented by additional absorbent materials.

          Therefore, the incorporation of additional absorbent materials to the absorbent layers of laminated products is increasingly important. It is particularly  
30 difficult to manage the application of powdered, granular, particulate, and short fibrous absorbent materials. Examples of processes to apply such

- 2 -

additional materials include Pelley, U.S. Patent No.,  
5,213,817, and Kock et al., U.S. Patent No. 4,551,191.

5 Kock discloses a method for uniformly distributing  
discrete particles on a moving porous web. It involves  
mixing particles within a moving airstream to provide a  
uniform distribution, and directing the particles out of  
a nozzle in a direction substantially parallel to the  
movement of the porous web. A pressure differential  
across the porous web is established and maintained in  
10 an area which coincides with the width of the particle  
discharge nozzle. Thus, the bulk of the discharged  
particles are substantially uniformly deposited onto the  
uppermost surface of the moving porous web.

Pelley discloses an apparatus for intermittently  
15 applying a particulate powder material to a moving  
fibrous substrate. Particles are dispensed from a  
hopper into an air stream. The resulting air-entrained  
particles are directed out of a nozzle which oscillates  
between first and second positions. In the first  
20 position, particles are applied to a predetermined  
location on the moving substrate, and in the second  
position, the particles are recirculated to the particle  
feed hopper. However, further improvements are needed  
to allow the controlled application of additional  
25 absorbent materials to discrete portions of a fibrous  
substrate.

An object of the present invention is to provide a  
process for smoothly depositing absorbent materials in a  
discrete pattern of fill and void areas onto a moving  
30 fibrous substrate. Another object of the present  
invention is to increase equipment simplicity, to  
provide high-speed pattern formation, and to provide  
repeatable, uniform patterns of absorbent material on a  
moving fibrous substrate.

- 3 -

Summary of the Invention

The present invention utilizes the smooth continuous motion of a masking belt to concentrate air-entrained absorbent materials on the surface of a moving fibrous substrate. Air flowing through the open areas of the masking belt carries the entrained material into the fibrous web. The fibrous web acts as a filter to separate the entrained material from the air stream.

Improved laminated absorbent structures can be manufactured according to the present invention. This invention relates to a continuous process for forming a laminated absorbent structure having reduced delamination tendencies. To practice this invention, one moves a fibrous substrate having lateral sides, a longitudinal axis, a first major surface, and a second major surface, opposite the first, the second major surface defined by a cover layer through a manufacturing zone having a pressure differential across the moving fibrous substrate. In this zone, the fluid pressure acting on the first major surface is greater than the fluid pressure acting on the second major surface. Thus, air is drawn through the fibrous substrate. While air is being drawn through the substrate, at least a portion of the second major surface is masked to prevent to air flow therethrough, and a metered amount of an absorbent material is provided to the first major surface in a pattern corresponding to the unmasked portion of the second major surface. At least a portion of the absorbent material can be densified to contain the absorbent material within the resulting absorbent structure. Additional process steps may include applying an adhesive to the first major surface to provide for lamination of additional layers or for the folding of the fibrous substrate.

- 4 -

One possible product of this invention is a laminated absorbent structure having reduced delamination tendencies. This structure includes a fibrous substrate having a first major surface and a second major surface, opposite the first, the second major surface defined by a cover layer. An adhesive composition is adhered to at least a portion of the first major surface of the fibrous substrate, and an absorbent material is at least partially immobilized by the adhesive composition and is disposed in a pattern to form at least one discrete absorbent material-containing zone which occupies less than 100% of the first major surface of the fibrous substrate and at least one absorbent material-free zone. The absorbent material is contained within the absorbent structure by at least the cover layer and at least one peripheral densification of the fibrous substrate in the at least one absorbent material-free zone. The fibrous substrate may be folded to fully enclose the absorbent material, or it may be covered by additional laminated layers. Because the densified areas are substantially free of the absorbent material, they are less likely to delaminate as this material absorbs substantial amounts of fluids and expands.

25

#### Brief Description of the Drawing

Fig. 1 is a side elevation illustrating the process of the present invention.

30

Fig. 2 is a side elevation of a forming chamber useful in the process of the present invention.

Fig. 3 is a view along line 3-3 of Fig. 2, illustrating the relationship between a dispensing

- 5 -

nozzle, a fibrous substrate, and a masking belt useful in the present invention.

Fig. 4 is a perspective view of one embodiment of an absorbent product of the present invention.

Fig. 5 is view along line 5-5 of Fig. 4, illustrating a C-folded product according to the present invention.

Fig. 6 is a view along line 6-6 of Fig. 4, illustrating a substantially absorbent material-free densification zone.

Fig. 7 is a top plan view of one embodiment of an absorbent product of the present invention.

Fig. 8 is view along line 8-8 of Fig. 7, illustrating a laminated product which has a substantially absorbent material-free densification zone according to the present invention.

#### Detailed Description of the Preferred Embodiment

The present invention utilizes the smooth continuous motion of a masking belt to concentrate air-entrained absorbent materials on the surface of a moving fibrous substrate. Air flowing through the open areas of the masking belt carries the entrained material into the fibrous web. The fibrous web acts as a filter to separate the entrained material from the air stream.

Referring to Figs. 1-3, the present invention relates to a process for forming absorbent structures. In the practice of the invention, a fibrous substrate is unwound from a supply roll onto a moving carrier

- 6 -

screen 14. Preferably, the fibrous substrate 10 includes a cover fabric layer and an air-laid fibrous layer. The carrier screen 14 moves over a masking belt 16 having void areas 18 and mask areas 20. The  
5 substrate 10, carrier screen 14, and masking belt 16 then move into a forming station 22.

The forming station 22 includes a forming chamber 24, an absorbent material supply nozzle 26, and a vacuum chamber 28. The forming station 22 may also include an  
10 air supply 30 to maintain a controlled atmospheric pressure in the forming chamber 24 and a sensor 32 to monitor this pressure. The material supply nozzle 26 is operatively connected to an absorbent material supply feeder 34 by means of, e.g., conduit 36.

15 In a preferred embodiment, the supply feeder 34 transfers absorbent material into a supply hopper 38 via a screw auger 40. The absorbent material is drawn through a venturi 42 to entrain the material in an air stream. The air-entrained material is delivered through  
20 the conduit 36 to the supply nozzle 26. From the supply nozzle 26, the air entrained material is drawn through the forming chamber 24 and onto the moving fibrous web 10 in a discrete pattern. The pattern of absorbent material deposition corresponds to the void areas 18 of  
25 the masking belt 16. This occurs as there is an atmospheric pressure differential between the forming chamber 24 and the vacuum chamber 28. Thus, the air will tend to flow through portions of the fibrous web 10 corresponding to the void areas 18 of the masking belt  
30 16. Again, the fibrous web 10 will tend to catch the entrained material to result in discrete areas of the fibrous web 10 having the absorbent material deposited thereon.



- 7 -

The forming station 22 of the present invention greatly reduces the amount of absorbent material which by-passes the moving web 10. Thus, absorbent material need not be recycled in the present process. Absorbent material recycling systems are typically a process and maintenance problem in current particulate absorbent dispensing systems. The mechanical complexity of the resulting system is greatly reduced. However, if desired, a recycling system could be included in the present process.

From the forming station 22, the fibrous web 10 can continue on for further processing such as folding of the fibrous substrate 10 at a folding station 44, application of a barrier layer 46, densification of the fibrous substrate 10 in regions corresponding to the mask areas 20 of the masking belt 16 to contain the absorbent material within the resulting absorbent product at a densification station 48, and cutting individual absorbent products from the continuous web 10 (not shown). The operation of these processes is well known to those of ordinary skill in the art.

In further detail, the lateral sides 45 can be folded parallel to the longitudinal axis of the moving web 10 in the folding station 44. Preferably, both lateral sides 45 are folded and meet at the longitudinal axis to fully enclose the first major surface of the moving web 10 on which the absorbent material has been deposited. This can be described as a c-folding process.

In the barrier layer 46 station, a web of release paper can be continuously coated with a hot melt pressure sensitive adhesive (PSA). This positioning adhesive is brought into contact with the barrier layer 46, and the construction is nipped to transfer the

- 8 -

adhesive to the barrier layer 46. The opposite side of the release paper is then coated with a construction adhesive, preferably another hot melt PSA, and the barrier layer 46 is adhered and nipped to the moving web 10.

Optional operations may include applying an adhesive pattern to the moving web 10 at an adhesive station 50. This pattern can be used to partially immobilize the absorbent material within the resulting absorbent structure and to help to secure further layers to the fibrous web 10, such as additional nonwoven layers or in the c-folding operation described above. The adhesive pattern can be applied as thin lines, wider stripes, cycloid patterns, dots, a fibril spray pattern, and the like. A preferred adhesive pattern is applied in a cycloid pattern as described in Boger, U.S. Patent No. 4,815,660, herein incorporated by reference.

The optional pressure sensor 32 in the forming chamber 24 may be used to control the optional air supply 30 to maintain a continuous pressure differential across the moving web 10 in the forming station 22. This is useful as there is no physical seal between the forming chamber 24, the moving web 10, and the vacuum chamber 28. If the air pressure within the forming chamber 24 is too low, air may leak into the chamber 24. If the velocity of air flowing into the chamber 24 is too great, the absorbent material deposited onto the moving web 10 may be disturbed as the web 10 exits the forming chamber 24. If the air pressure within the forming chamber 24 is too high, absorbent material-laden air may leak out of the chamber 24, causing undesirable dusting of the absorbent material outside of the forming station 22. Therefore, it is helpful to have the air pressure in the forming chamber 24 slightly below

- 9 -

atmospheric pressure outside of the forming chamber 24. Therefore, the exiting effects would be minimal.

The process of the present invention can be used to produce several different types of absorbent products.

5 Examples of such products include panty liners, sanitary napkins, incontinence devices, diapers, absorbent pads and liners, and the like. Two embodiments of these products are illustrated in Figs. 4-6 and 7-8, respectively.

10 Referring now to Figs. 4-6, there is illustrated a C-folded absorbent product 100 having an absorbent material 102 distributed therein. The absorbent product 100 includes an absorbent structure 104 having a cover layer 106, a fibrous layer 108, and a construction  
15 adhesive 110. The absorbent structure 104 may be adhered to a barrier layer 112 having a positioning adhesive 114 disposed upon a garment-facing surface 116 thereof. The positioning adhesive 114 may be protected by a release liner 118.

20 At the longitudinal ends 120 of the product 100, there are densified areas 122. These areas 122 are substantially absorbent material-free. By "substantially absorbent material-free", it is meant that there is not enough absorbent material in these  
25 areas to allow the absorbent material to cause a lamination failure as the product becomes saturated with fluids. Preferably, there is less than about  $1 \text{ mg/cm}^2$ , more preferably, less than about  $0.4 \text{ mg/cm}^3$ , and most preferably, less than about  $0.03 \text{ mg/cm}^2$  of the absorbent  
30 material 102 in these densified areas 122. If there is too much absorbent material in the densified areas, the product may delaminate when saturated. It can be seen that the absorbent material 102 is fully contained within the absorbent product 100 by the cover layer 106

- 10 -

and the densified areas 122. This reduces loss of the generally expensive absorbent material 102 during the processing, shipping, and handling of the products 100 prior to use.

5           The fibrous substrate 104 may have a cover layer 106 and a fibrous layer 108. The cover layer 106 may be a nonwoven fabric such as a spunbonded fabric, a thermal bonded fabric, a resin bonded fabric, and the like; an  
10       like; a densified top layer formed with hydrogen bonding; or any other suitable covering surface. The fibrous layer 108 may comprise cellulosic fibers, including wood pulp and cotton pulp; synthetic fibers, including polyolefins, polyesters, and bicomponent  
15       fibers; and the like. Useful absorbent structures and top surfaces are disclosed in Cancian et al., U.S. Patent No. 4,592,943; Mays, et al. U.S. Patent No. 4,713,134; Mays U.S. Patent No. 4,787,947; Shimalla et al., U.S. Patent No. 4,774,124; Luceri, EP-A-0 597 273;  
20       and the commonly assigned, copending application, Clark et al., U.S. Serial No. 08/236,762; the disclosures of which are herein incorporated by reference.

          The absorbent material 102 may be formed of synthetic fibers, including spunbonded, melt blown card  
25       and bind staple fibers; cellulosic fibers such as wood pulp, stabilized wood pulp, peat moss; and superabsorbents. Useful superabsorbents include polyacrylates; modified natural and regenerated polymers such as polysaccharides; hydrocolloids such as modified  
30       polyacrylonitrile compounds; cross-linked nonionic polymers such as polyoxyethylene, polyoxypropylene and mixture thereof; derivatives of isobutylene-maleic anhydride copolymers; copolymers such as those disclosed in Le-Khac, U.S. Patent Nos. 4,731,067; 4,743,244;

- 11 -

4,788,237; 4,813,945; 4,880,868; 4,892,533; and  
5,151,465.

Preferably, the absorbent material 102 is a  
superabsorbent, more preferably, it is a superabsorbent  
5 powder, and most preferably, the absorbent material 102  
is a particulate sodium polyacrylate superabsorbent,  
Aqua Keep J-550, available from Sumitomo Seika Chemical  
Company, Ltd. The absorbent material 102 can be applied  
to the moving web as necessary to provide the desired  
10 amount of absorbent material 102 to the resulting  
individual pads. Preferably, the absorbent material 102  
is applied at about 100 to 1,000 mg/pad, more preferably  
about 200 to 800 mg/pad, and most preferably at about  
400 to 600 mg/pad.

15 The barrier layer 112 may be formed of any barrier  
film useful in the disposable absorbent product art.  
Useful films include, without limitation, polyolefin  
films such as polyethylene and polypropylene; polyvinyl  
films such as polyvinyl acetate, polyvinyl chloride, and  
20 polyvinylidene chloride; copolymeric films such as  
ethylene-vinyl acetate, and blends or laminates of one  
or more of the above polymers. Preferred barrier films  
include ethylene-vinyl acetate/polyethylene laminate  
films and polypropylene films. More preferably, the  
25 barrier film is a polyolefin such as polyethylene.

The selection of construction adhesive 110 and  
positioning adhesive 114 is not critical to the practice  
of the present invention. These adhesives may  
independently be chosen from solvent-releasing, e.g.,  
30 emulsion or organic solvent based; curing, e.g.,  
radiation cure, electron beam, or catalytic cure; or hot  
melt. Preferred adhesives include hot melt adhesives  
which may also be pressure sensitive adhesives (PSA). A  
representative, non-limiting list of useful adhesives

- 12 -

includes those based on natural rubber, styrene/butadiene latex, A-B-A block copolymer, butyl rubber and polyisobutylene, acrylics including vinyl acetate-acrylate copolymers, vinyl ether polymers, polyalkene polymers, polyurethane, ethylene-vinyl acetate copolymers and polypropylene including atactic polypropylene. Preferably, the adhesive is an A-B-A block copolymer, an acrylic resin, or an ethylene-vinyl acetate copolymer. More preferably, the construction adhesive is based on an A-B-A block copolymer hot melt adhesive, such as National Starch #34-5539, and the positioning adhesive is an A-B-A block copolymer hot melt adhesive, such as H.B. Fuller Co. HL-1335.

The adhesive can be applied to the absorbent pad in any manner known to the ordinary practitioner. Such application methods include, without limitation, spraying, transfer coating, roll coating, slot coating, gravure rolling, etc.

Referring now to Figs. 7-8, there is illustrated a laminated absorbent product 200 having an absorbent material 202 distributed therein. The absorbent product 200 includes an absorbent structure 204 having a cover layer 206, a fibrous layer 208, and a construction adhesive 210. The absorbent structure 204 may be laminated to a barrier layer 212 having a positioning adhesive 214 disposed upon a garment-facing surface 216 thereof. The positioning adhesive 214 may be protected by a release liner 218.

At the peripheral edges 220 of the product 200, there is a densified area 222. This area 222 is substantially absorbent material-free. It can be seen that the absorbent material 202 is fully contained within the absorbent product 200 by the cover layer 206, the barrier layer 212, and the densified areas 222.

- 13 -

This reduces loss of the generally expensive absorbent material 202 during the processing, shipping, and handling of the products 200 prior to use.

5       The fibrous substrate 204, cover layer 206, fibrous layer 208, barrier layer 212, absorbent material 202, positioning adhesive 214, and construction adhesive 210 may be selected from the materials listed above.

10       The specification and embodiments above are presented to aid in the complete and non-limiting understanding of the invention disclosed herein. Since  
many variations and embodiments of the invention can be made without departing from its spirit and scope, the  
15       invention resides in the claims hereinafter appended.

- 14 -

## WHAT IS CLAIMED IS:

1. A laminated absorbent structure having reduced delamination tendencies comprising:

- 5           a) a fibrous substrate having a first major surface and a second major surface, opposite the first, the second major surface defined by a cover layer;
- 10           b) an adhesive composition adhered to at least a portion of the first major surface of the fibrous substrate; and
- 15           c) an absorbent material which is at least partially immobilized by the adhesive composition and which is disposed in a pattern to form at least one discrete absorbent material-containing zone which occupies less than 100% of the first major surface of the fibrous substrate and at least one absorbent material-free zone;

20 wherein the absorbent material is contained within the absorbent structure by at least the cover layer.

25           2. The structure of claim 1 further comprising at least one peripheral densification of the fibrous substrate in the at least one absorbent material-free zone

30           3. The structure of claim 1 wherein the fibrous substrate is folded upon itself, thereby providing an outer surface of the cover layer.

          4. The structure of claim 1 wherein a containing layer overlies the first major surface and absorbent material to contain the absorbent material.



- 15 -

5. The structure of claim 4 wherein the containing layer comprises a nonwoven layer.

6. The structure of claim 4 wherein the containing  
5 layer comprises a barrier layer.

7. The structure of claim 1 wherein the absorbent material is disposed in a pattern to form absorbent material-free zones in interior portions of the first  
10 major surface of the fibrous substrate.

8. The structure of claim 1 wherein the absorbent material is a particulate superabsorbent polymer.

9. The structure of claim 1 wherein the absorbent  
15 material is a fibrous superabsorbent polymer.

10. The structure of claim 9 wherein the fibrous superabsorbent polymer has fibers less than about 1 cm  
20 in length.

11. A laminated absorbent product having reduced delamination tendencies comprising:

a) a laminated absorbent structure having  
25 longitudinal ends, a longitudinal axis, and lateral sides and comprising:

i) a fibrous substrate having a first major surface and a second major surface, opposite the first, the second major surface defined by a cover layer;  
30

ii) an adhesive composition adhered to at least a portion of the first major surface of the fibrous substrate; and

- 16 -

- iii) an absorbent material which is at least partially immobilized by the adhesive composition and which is disposed in a pattern to form at least one discrete absorbent material-containing zone which occupies less than 100% of the first major surface of the fibrous substrate and at least one absorbent material-free zone located at each longitudinal end; wherein the lateral sides of the fibrous substrate are folded parallel to the longitudinal axis to contain the absorbent material, to provide an outer surface of the cover layer, and to form the absorbent structure;
- b) a barrier layer attached to a portion of the outer surface of the absorbent structure; and
- c) longitudinal end seals wherein at least the absorbent material-free zone of the absorbent structure is densified to further contain the absorbent material within the absorbent structure.

12. A continuous process for forming a laminated absorbent structure having reduced delamination tendencies comprising the steps of:

- a) providing a moving fibrous substrate having lateral sides, a longitudinal axis, a first major surface, and a second major surface, opposite the first, the second major surface defined by a cover layer;
- b) providing a pressure differential across the moving fibrous substrate, wherein fluid pressure acting on the first major surface is greater than the fluid pressure acting on the

- 17 -

second major surface, thereby drawing air through the fibrous substrate;

c) masking at least a portion of the second major surface to air flow;

5 d) providing a metered amount of an absorbent material to the first major surface in a pattern corresponding to the unmasked portion of the second major surface; and

10 e) densifying at least a portion of the fibrous substrate corresponding to the masked portion to laterally contain the absorbent material within the resulting absorbent structure.

15 13. The process of claim 12 wherein the metered amount of the absorbent material is provided in an airstream.

20 14. The process of claim 12 further comprising the step of folding the fibrous substrate upon itself to provide an outer surface of the cover layer.

25 15. The process of claim 14 wherein the lateral sides of the fibrous substrate are folded parallel to the longitudinal axis to contain the absorbent material and to provide an outer surface of the cover layer.

30 16. The process of claim 12 further comprising the step of placing a containing layer over the first major surface to contain the absorbent material.

17. The process of claim 12 further comprising applying an adhesive composition to at least a portion of the first major surface of the fibrous substrate.

- 18 -

18. The process of claim 16 wherein the adhesive composition is applied to the substrate before the application of the absorbent material.

5           19. A continuous process for forming a laminated absorbent product having reduced delamination tendencies comprising the steps of:

10               a) providing a moving fibrous substrate having lateral sides, a longitudinal axis, a first major surface, and a second major surface, opposite the first, the second major surface defined by a cover layer;

15               b) applying an adhesive composition to at least a portion of the first major surface of the fibrous substrate;

20               c) providing a pressure differential across the moving fibrous substrate, wherein fluid pressure acting on the first major surface is greater than the fluid pressure acting on the second major surface, thereby drawing air through the fibrous substrate;

              d) masking at least a portion of the second major surface corresponding to longitudinal product ends to air flow;

25               e) providing a metered amount of an absorbent material to the first major surface in a pattern corresponding to the unmasked portion of the second major surface;

30               f) folding the lateral sides of the fibrous substrate parallel to the longitudinal axis to contain the absorbent material, to provide an outer surface of the cover layer, and to provide an absorbent structure;


- 19 -

g) attaching a barrier layer to one surface of the absorbent structure;



h) densifying at least a portion of the fibrous substrate corresponding to the masked portion to laterally contain the absorbent material within the absorbent structure; and

i) separating individual laminated absorbent products at their longitudinal ends, leaving a densified portion at the longitudinal end of each product.




FIG. 1

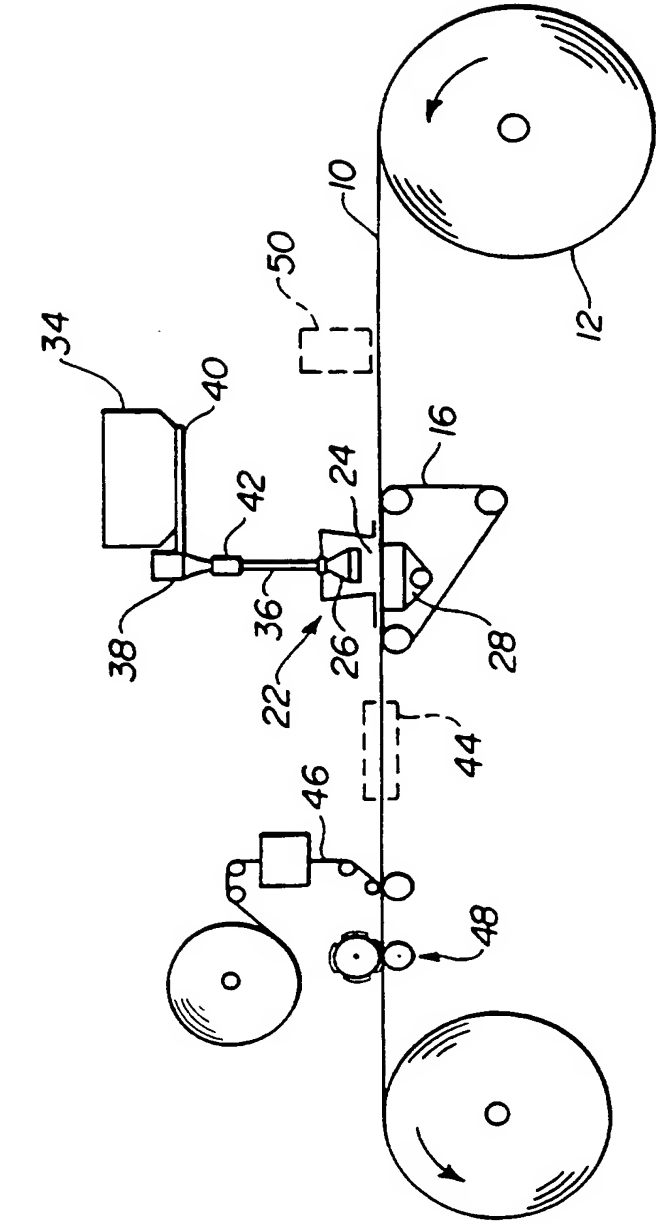

2/4

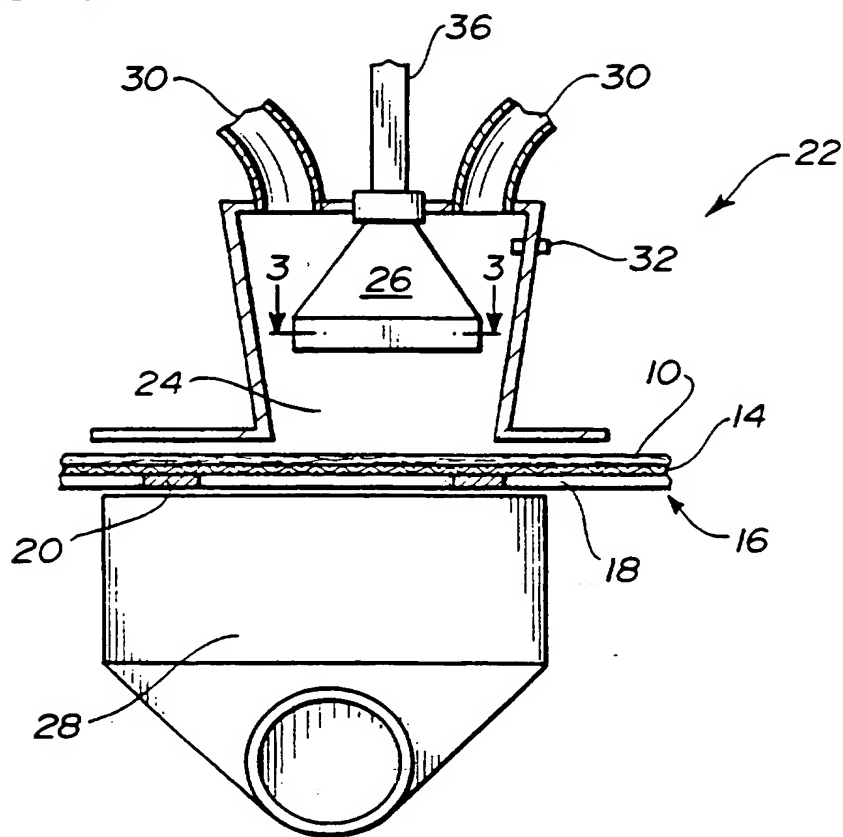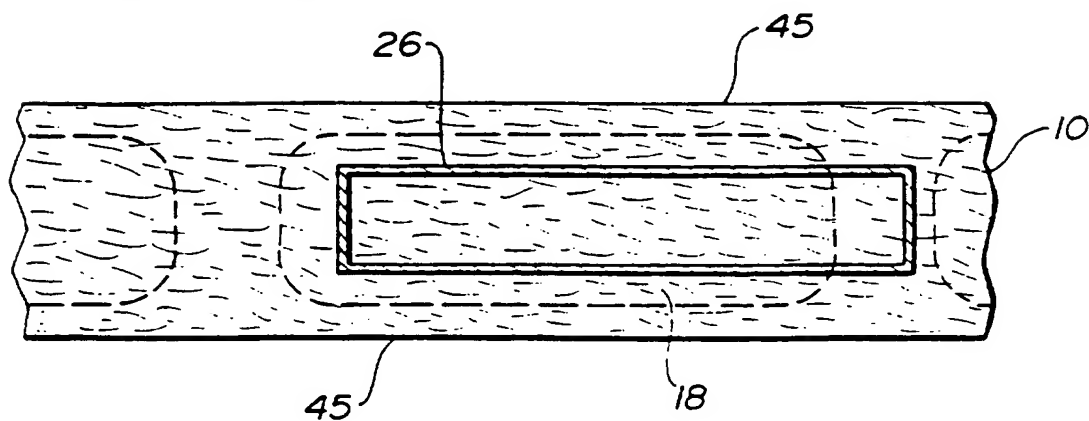**FIG. 2****FIG. 3**

3/4

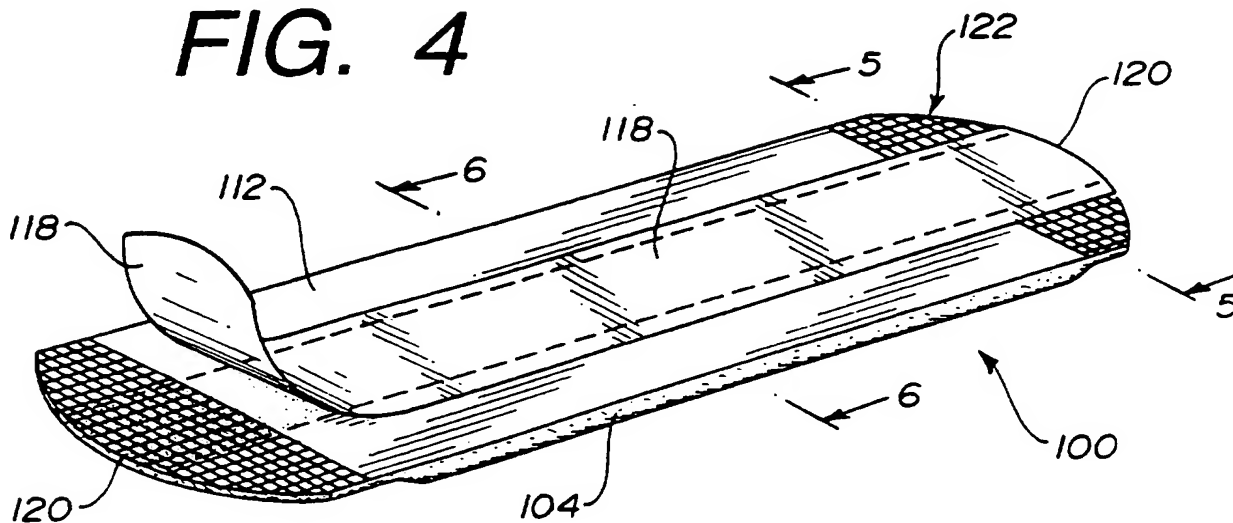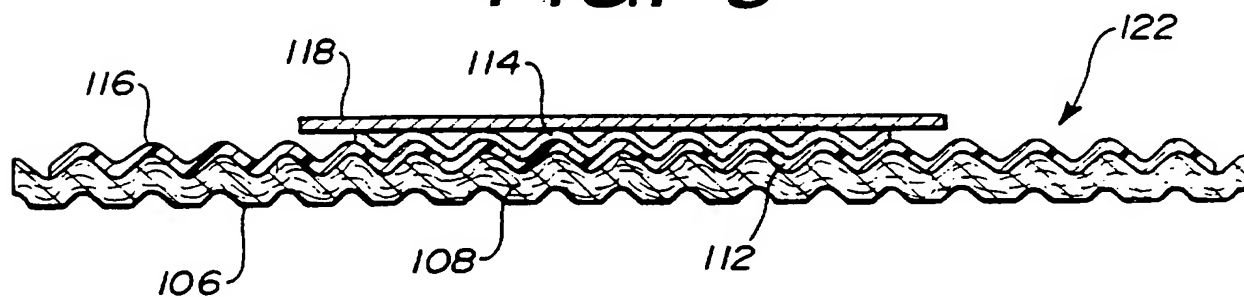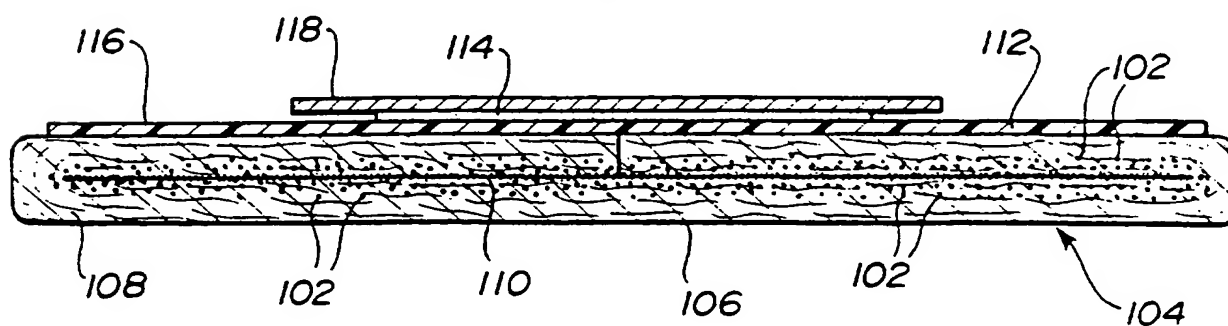**FIG. 4****FIG. 5****FIG. 6**



4/4

FIG. 7


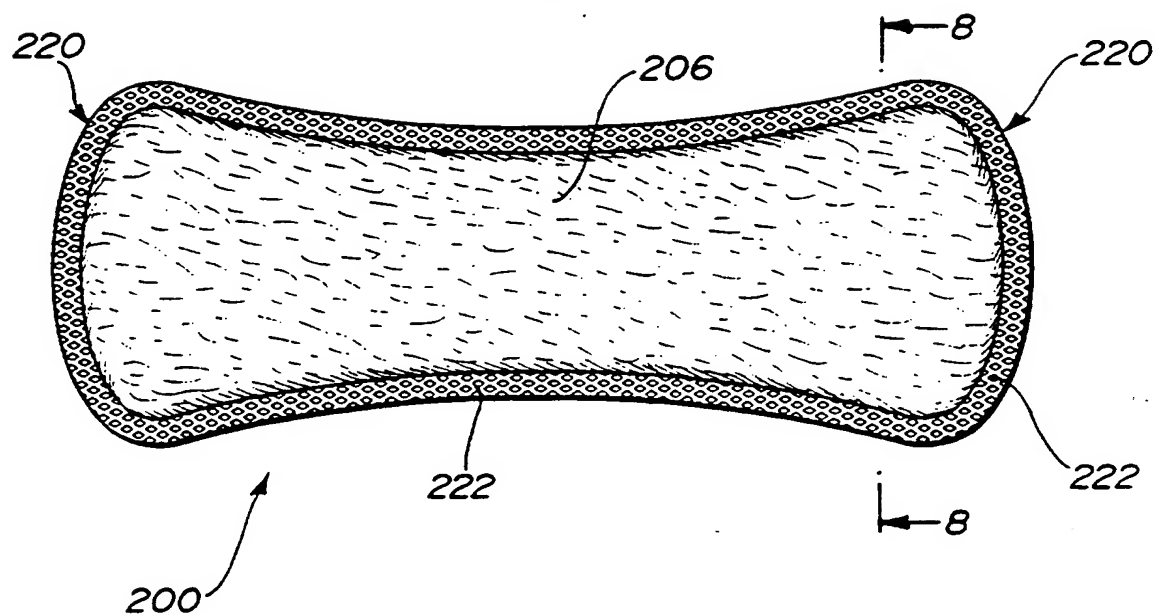


FIG. 8





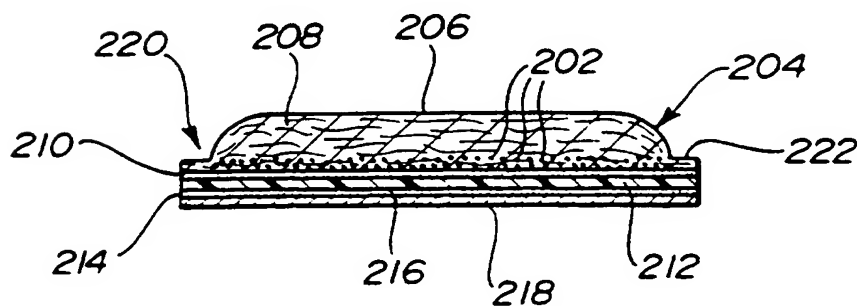


## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

<b>(51) International Patent Classification <sup>6</sup> :</b> <b>A61F 13/15</b>	<b>A3</b>	<b>(11) International Publication Number:</b> <b>WO 96/17574</b> <b>(43) International Publication Date:</b> 13 June 1996 (13.06.96)
<b>(21) International Application Number:</b> PCT/US95/15904 <b>(22) International Filing Date:</b> 6 December 1995 (06.12.95)  <b>(30) Priority Data:</b> 08/350,920                      7 December 1994 (07.12.94)                      US  <b>(71) Applicant:</b> McNEIL-PPC, INC. [US/US]; Grandview Avenue, Skillman, NJ 08558 (US).  <b>(72) Inventors:</b> PELLEY, Kenneth; 104 Stony Brook Road, Hopewell, NJ 08525 (US). FOELSCH, Lynn; 1803 Wilshire Court, Somerville, NJ 08876 (US). BICKLEY, William, M.; 715 Edison Glen Terrace, Edison, NJ 08837 (US).  <b>(74) Agents:</b> CIAMPORCERO, Audley, A., Jr. et al.; Johnson & Johnson, One Johnson & Johnson Plaza, New Brunswick, NJ 08933-7003 (US).		<b>(81) Designated States:</b> AU, BR, CA, JP, MX, SG, TT, European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).  <b>Published</b> <i>With international search report.</i>  <b>(88) Date of publication of the international search report:</b> 29 August 1996 (29.08.96)

**(54) Title:** PROCESS FOR FORMING LAMINATED ABSORBENT STRUCTURE**(57) Abstract**

The present invention utilizes the smooth continuous motion of a masking belt to concentrate air-entrained absorbent materials on the surface of a moving fibrous substrate. Air flowing through the open areas of the masking belt carries the entrained material into the fibrous web. The fibrous web acts as a filter to separate the entrained material from the air stream. Substantially all dispensed material is captured by the fibrous web, and expensive and complex absorbent material recycle systems can be eliminated.

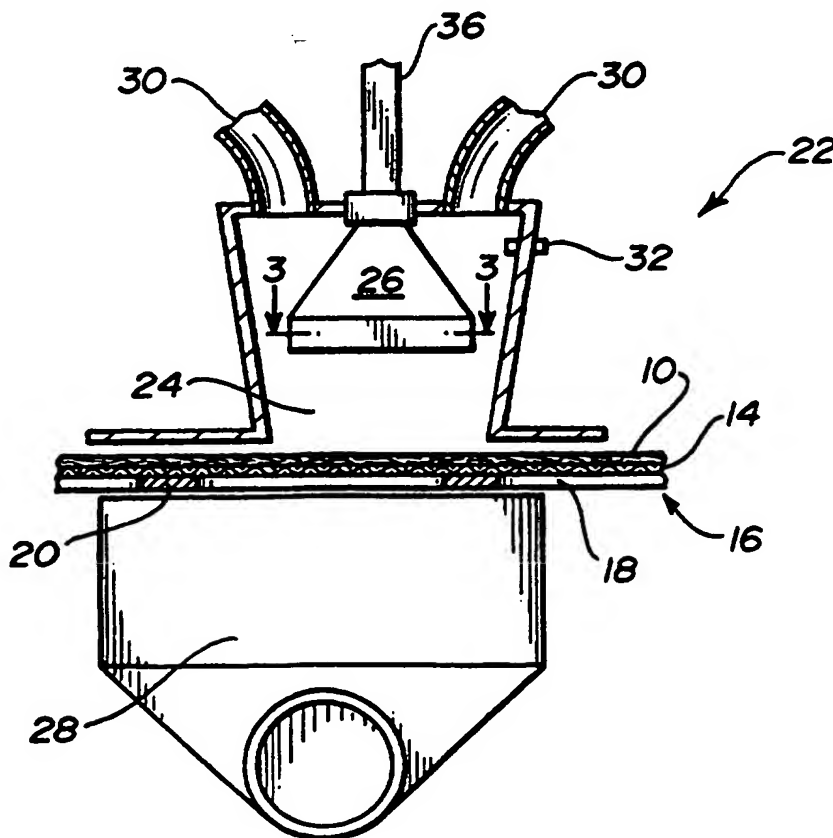

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	GB	United Kingdom	MR	Mauritania
AU	Australia	GE	Georgia	MW	Malawi
BB	Barbados	GN	Guinea	NE	Niger
BE	Belgium	GR	Greece	NL	Netherlands
BF	Burkina Faso	HU	Hungary	NO	Norway
BG	Bulgaria	IE	Ireland	NZ	New Zealand
BJ	Benin	IT	Italy	PL	Poland
BR	Brazil	JP	Japan	PT	Portugal
BY	Belarus	KE	Kenya	RO	Romania
CA	Canada	KG	Kyrgyzstan	RU	Russian Federation
CF	Central African Republic	KP	Democratic People's Republic of Korea	SD	Sudan
CG	Congo	KR	Republic of Korea	SE	Sweden
CH	Switzerland	KZ	Kazakhstan	SI	Slovenia
CI	Côte d'Ivoire	LI	Liechtenstein	SK	Slovakia
CM	Cameroon	LK	Sri Lanka	SN	Senegal
CN	China	LU	Luxembourg	TD	Chad
CS	Czechoslovakia	LV	Latvia	TG	Togo
CZ	Czech Republic	MC	Monaco	TJ	Tajikistan
DE	Germany	MD	Republic of Moldova	TT	Trinidad and Tobago
DK	Denmark	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	US	United States of America
FI	Finland	MN	Mongolia	UZ	Uzbekistan
FR	France			VN	Viet Nam
GA	Gabon				

## INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 95/15904

**A. CLASSIFICATION OF SUBJECT MATTER**  
IPC 6 A61F13/15

According to International Patent Classification (IPC) or to both national classification and IPC

**B. FIELDS SEARCHED**Minimum documentation searched (classification system followed by classification symbols)  
IPC 6 A61F

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

**C. DOCUMENTS CONSIDERED TO BE RELEVANT**

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO,A,94 02092 (FATER SPA) 3 February 1994 see page 12, paragraph 2 - page 35, paragraph 1; claims; figures ---	1,3-8,11
X	GB,A,2 255 720 (KAO CORP) 18 November 1992 see the whole document ---	1,3,9,10
X	WO,A,85 02110 (BEGHIN SAY SA) 23 May 1985 see the whole document ---	1,3-6
X	GB,A,2 133 291 (COLGATE PALMOLIVE CO) 25 July 1984 see the whole document ---	1
X	GB,A,2 157 570 (WINKLER DUENNEBIER KG MASCH) 30 October 1985 see the whole document ---	1,3,8
	-/--	

☒ Further documents are listed in the continuation of box C.☒ Patent family members are listed in annex.

## \* Special categories of cited documents:

- \*A\* document defining the general state of the art which is not considered to be of particular relevance
- \*E\* earlier document but published on or after the international filing date
- \*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- \*O\* document referring to an oral disclosure, use, exhibition or other means
- \*P\* document published prior to the international filing date but later than the priority date claimed

\*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

\*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

\*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

\*A\* document member of the same patent family

Date of the actual completion of the international search

28 May 1996

Date of mailing of the international search report

04.06.96

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Douskas, K

## INTERNATIONAL SEARCH REPORT

Int. Application No.

PCT/US 95/15904

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	GB,A,2 124 499 (KIMBERLY CLARK CO) 22 February 1984 see the whole document ---	1,3-6, 9-11
P,X	US,A,5 460 623 (EMENAKER RALPH R ET AL) 24 October 1995 see the whole document ---	1,3-8,11
A	EP,A,0 509 409 (KIMBERLY CLARK CO) 21 October 1992 see claims; figures ---	1
A	US,A,4 023 570 (CHINAI KAYS ET AL) 17 May 1977 cited in the application see column 3, line 59 - column 5, line 19; figures ---	1
A	EP,A,0 463 716 (JAMES RIVER CORP) 2 January 1992 see claims; figures ---	1,12
X	FR,A,2 555 895 (WINKLER DUENNEBIER KG MASCH) 7 June 1985 see the whole document ---	1
Y	---	14,15,19
X	EP,A,0 478 182 (MCNEIL PPC INC) 1 April 1992 see the whole document ---	1,3-5, 11-13
Y	---	14,15,19
A	US,A,4 723 954 (PIENIAK HEINZ A) 9 February 1988 see claims; figures ---	1,12
A	US,A,4 915 897 (FARRINGTON ALLAN P ET AL) 10 April 1990 see claims; figures ---	12
A	US,A,5 145 351 (ROSSI GUIDO) 8 September 1992 see claims; figures -----	12

## INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/US 95/15904

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO-A-9402092	03-02-94	IT-B- 1257102 AU-B- 4655993 CA-A- 2140036 CN-A- 1085771 JP-T- 7509383	05-01-96 14-02-94 03-02-94 27-04-94 19-10-95
GB-A-2255720	18-11-92	JP-A- 4322645	12-11-92
WO-A-8502110	23-05-85	FR-A- 2554390 CA-A- 1249401 DE-A- 3474108 EP-A,B 0163680 JP-B- 6073535 JP-T- 61500364 OA-A- 8057 US-A- 4731071	10-05-85 31-01-89 27-10-88 11-12-85 21-09-94 06-03-86 31-03-87 15-03-88
GB-A-2133291	25-07-84	US-A- 4505706 AU-B- 561859 AU-B- 2320884 BE-A- 898676 CA-A- 1210201 CH-A- 662726 DE-A- 3400374 FR-A,B 2539275 JP-A- 59150102 NL-A- 8400119	19-03-85 21-05-87 19-07-84 13-07-84 26-08-86 30-10-87 09-08-84 20-07-84 28-08-84 01-08-84
GB-A-2157570	30-10-85	DE-A- 3415196 FR-A,B 2563102 JP-A- 60232154 SE-B- 458419 SE-A- 8500682 US-A- 4650480	24-10-85 25-10-85 18-11-85 03-04-89 22-10-85 17-03-87
GB-A-2124499	22-02-84	NONE	
US-A-5460623	24-10-95	AU-B- 1041295 WO-A- 9523570 ZA-A- 9408508	18-09-95 08-09-95 22-06-95

## INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/US 95/15904

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP-A-0509409	21-10-92	AU-B- 1382492	22-10-92
		CA-A- 1324487	23-11-93
		CA-A- 1328987	03-05-94
		JP-A- 5123355	21-05-93
		US-A- 5342333	30-08-94
		US-A- 5364380	15-11-94
US-A-4023570	17-05-77	AR-A- 216908	15-02-80
		AU-B- 504878	01-11-79
		AU-B- 2155477	27-07-78
		BE-A- 850010	30-06-77
		CH-A- 612346	31-07-79
		DE-A- 2658605	03-11-77
		FR-A,B 2348691	18-11-77
		JP-C- 1261654	25-04-85
		JP-A- 52128689	28-10-77
		JP-B- 59036535	04-09-84
		LU-A- 76680	27-06-77
		NL-A- 7700490	25-10-77
		SE-B- 419158	20-07-81
		SE-A- 7614359	22-10-77
EP-A-046, '16	02-01-92	US-A- 5128082	07-07-92
		US-A- 5378528	03-01-95
FR-A-255,395	07-06-85	DE-A- 3344032	13-06-85
		GB-A,B 2151143	17-07-85
		GB-A,B 2163657	05-03-86
		JP-A- 60139243	24-07-85
		SE-B- 458172	06-03-89
		SE-A- 8405200	07-06-85
		US-A- 4560379	24-12-85
EP-A-0478182	01-04-92	AU-B- 8383591	19-03-92
		AU-B- 650046	09-06-94
		AU-B- 8383891	19-03-92
		CA-A- 2051149	13-03-92
		CA-A- 2051163	13-03-92
		DE-D- 69106468	16-02-95
		DE-T- 69106468	14-06-95



# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/US 95/15904

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP-A-0478182		EP-A- 0479442	08-04-92
		ES-T- 2066365	01-03-95
		NZ-A- 239725	27-01-95
		NZ-A- 239726	26-05-94
		ZA-A- 9107282	12-03-93
		ZA-A- 9107283	12-03-93
-----			
US-A-4723954	09-02-88	NONE	
-----			
US-A-4915897	10-04-90	AU-B- 2271088	23-03-89
		CA-A- 1313936	02-03-93
		DE-A- 3832098	03-05-89
		JP-A- 1298219	01-12-89
-----			
US-A-5145351	08-09-92	AU-B- 5527390	29-11-90
		CA-A- 2032506	06-11-90
		WO-A- 9013278	15-11-90
		EP-A- 0425614	08-05-91
-----			

**THIS PAGE BLANK (USPTO)**